


8.8

Socket head cap screws
with low head, steel
with pilot recess

DIN 6912

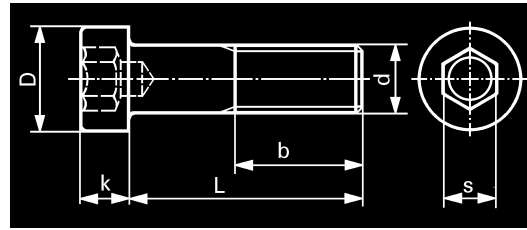

d	M 4		M5		M6		M 8		
D	7		8,5		10		13		
b	14		16		18		22		
k	2,8		3,5		4		5		
s	3		4		5		6		
L	quantity	100	1000+	100	1000+	100	1000+	100	1000+
8		21.25	15.70	23.75	17.60	23.75	17.60		
10		17.60	13.-	18.90	13.90	20.-	14.90	47.-	36.25
12		18.10	13.30	18.20	13.50	19.60	14.50	33.75	26.-
(14)		21.75	16.10	21.50	15.80	21.75	16.10	35.25	27.-
(15)						22.-	16.50		
16		18.90	13.90	18.60	13.70	18.90	13.90	27.25	20.-
(18)		23.25	17.20	23.-	17.-	23.75	17.60	28.75	22.25
20		19.60	14.50	19.20	14.20	20.-	14.90	25.75	19.-
(22)		27.50	20.50	28.25	21.-	28.75	21.-	28.25	21.75
25		24.-	17.80	20.-	14.90	20.75	15.40	26.50	19.70
30		26.-	19.30	22.25	16.40	22.75	16.80	27.75	21.25
35		28.75	22.25	26.75	19.80	27.25	20.-	30.25	23.25
40		30.-	23.-	27.50	20.25	28.50	21.-	32.25	24.75
45				32.75	25.25	31.-	23.75	38.25	29.50
50				45.-	34.50	31.-	23.75	38.25	29.50
55				53.-	39.-	43.50	33.50	48.-	36.75
60				56.-	39.50	46.50	36.-	46.50	35.75
65						65.50	47.50	69.-	53.-
70						63.50	45.60	62.50	48.-
(75)						77.-	61.-	78.-	61.50
80						66.-	53.-	80.50	64.50
90						81.-	65.10	113.-	87.-
100						81.50	65.50	123.-	99.-
110						126.-	90.-	153.-	118.-
120								158.-	123.-
150								239.-	169.-


Reduced tightening and loads: refer to page T 25

+ 10% discount for 10 000 pieces per item
----- Above dash-line: fully threaded

8.8

Socket head cap screws
with low head, steel
with pilot recess

DIN 6912

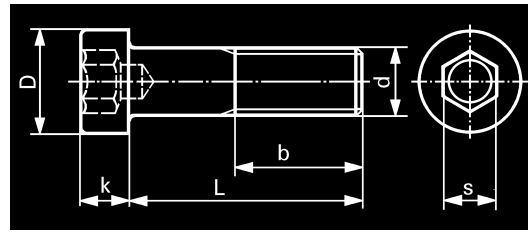

d	M10		M12	(M14)	M16	M20	M24	M30
D	16		18	21	24	30	36	45
b/b*	26/32		30/36	34/40	38/44	46/52	54/60	66/72
k	6,5		7,5	8,5	10	12	14	17,5
s	8		10	12	14	17	19	22
L quantity	100	1000	100	100	100	100	100	100
(14)	53.50	38.25						
16	45.-	34.75						
(18)	49.-	37.75						
20	41.50	32.-	72.-					
25	45.-	34.75	66.-		135.-			
30	47.-	36.25	68.50	204.-	130.-	510.-	730.-	
35	48.50	37.50	70.-		130.-	465.-	730.-	
40	50.50	39.-	73.50	224.-	137.-	380.-	515.-	
45	56.-	43.-	78.50	284.-	153.-	388.-	580.-	
50	56.50	43.50	79.-	260.-	153.-	455.-	525.-	930.-
55	72.-	55.50	98.-		174.-	460.-	545.-	945.-
60	65.50	52.50	97.-		174.-	465.-	560.-	970.-
65	76.50	63.-	124.-		201.-	485.-	685.-	1190.-
70	82.-	66.-	112.-		194.-	475.-	665.-	1070.-
(75)	90.50	74.-	148.-		223.-	520.-	745.-	1270.-
80	93.50	75.-	131.-		229.-	510.-	830.-	1110.-
90	139.-	108.-	175.-		268.-	575.-	875.-	1260.-
100	144.-	120.-	197.-		276.-	580.-	900.-	1270.-
110			270.-		342.-	645.-	940.-	1390.-
120	260.-	201.-	292.-		376.-	675.-	960.-	1400.-
130					410.-	735.-	1240.-	1550.-
140					460.-	790.-	1360.-	1710.-
150					525.-	830.-	1660.-	2000.-
160						940.-	1750.-	2060.-
180						1040.-	1860.-	
200						1140.-	2140.-	

Reduced tightening and loads: refer to page T 25

b* for L = 130-200 mm


----- Above dash-line: fully threaded

Maryland Metrics Fastener Catalog - Chapter C Owings Mills, MD 21117 USA

8.8

Socket head cap screws
with low head, steel
with pilot recess

DIN 6912

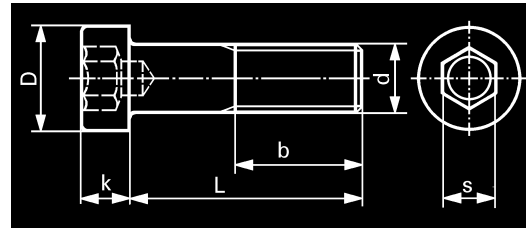

Zinc plated

d	M4		M5		M6		M8	
D	7		8,5		10		13	
b	14		16		18		22	
k	2,8		3,5		4		5	
s	3		4		5		6	
L quantity	100	1000+	100	1000+	100	1000+	100	1000+
8	26.25	17.90	26.-	18.50	28.50	20.50		
10	21.75	15.20	23.50	16.40	24.-	17.60		
12	22.25	15.50	22.75	15.90	23.75	17.30	40.-	30.50
(14)			25.-	18.-	26.-	19.10		
16	23.25	16.30	23.25	16.30	23.50	17.10	32.25	24.25
20	24.-	16.80	24.25	17.10	24.75	18.-	31.50	23.50
(22)			28.50	21.-				
25	28.50	20.50	25.-	17.80	25.75	18.80	33.-	24.75
30	30.75	22.-	27.50	19.70	28.-	20.50	35.50	27.-
35			32.25	23.25	32.25	24.-	39.25	29.75
40			33.-	24.-	33.75	25.50	42.-	32.-
45			40.-	29.75	38.-	29.-		
50			51.50	39.50	38.25	29.25	49.50	37.75
55					52.50	39.75		
60			61.-	49.80	55.50	42.50	59.50	45.50
70					71.50	56.50	75.50	59.50
(75)					81.-	67.10		
Reduced tightening and loads: refer to page T 25								


+ 10% discount for 10 000 pieces per item

----- Above dash-line: fully threaded

8.8

Socket head cap screws
with low head, steel
with pilot recess

DIN 6912

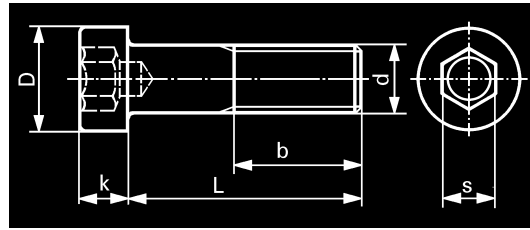

Zinc plated

d	M 10		M 12	M 16	
D	16		18	24	
b	26		30	38	
k	6,5		7,5	10	
s	8		10	14	
L	quantity	100	1000	100	100
16		55.-	41.50		
20		52.-	39.50	82.50	
25		56.50	43.-	84.-	
30		59.-	45.-	85.50	210.-
35		62.-	47.50	88.-	215.-
40		65.50	49.50	92.50	
45		69.-	54.50		228.-
50		70.50	56.-	102.-	
55		90.50	69.-		
60		84.-	63.-	123.-	239.-
70		103.-	82.-		
Reduced tightening and loads:					

----- Above dash-line: fully threaded