


BRASS

Socket screw plugs


DIN 908

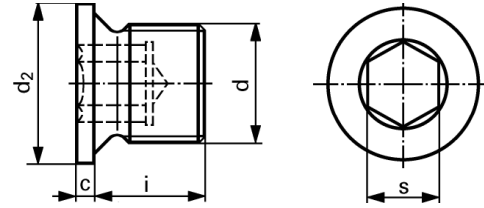

d		c	d2	i	s plain	
		+0,5	h14	±0,2		
quantity					10	100
G 1/8"	3	14	8	5	133.-	83.-
G 1/4"	3	18	12	6	242.-	120.-
G 3/8"	3	22	12	8	302.-	160.-
G 1/2"	4	26	14	10	356.-	249.-
G 3/4"	4	32	16	12	533.-	369.-
G 1 "	5	39	16	17	850.-	520.-
G 1 1/4"	5	49	16	22	1181.-	790.-
G 1 1/2"	5	55	16	24	1800.-	1310.-

Hex head screw plugs,
heavy type

DIN 910

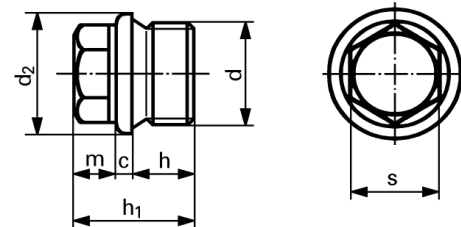

d	c	d2	h	h1	m	s	blank	
	+0,5	h14	±0,2	≈	±1/2T15		10	100
quantity								
G 1/8"	3	14	8	17	6	10	220.-	151.-
G 1/4"	3	18	12	21	6	13	275.-	175.-
G 3/8"	3	22	12	21	6	17	350.-	245.-
G 1/2"	4	26	14	26	8	19	510.-	380.-
G 3/4"	4	32	16	30	10	24	770.-	560.-
G 1 "	5	39	16	32	11	27	1450.-	1100.-