


# HRC 60

Dowel pins, steel, hardened and ground

ISO 8734 A / DIN 6325 Tol. m6




Tolerance h6: 15% surcharge

d	1		1,5		2		2,5	
c	0,5		0,6		0,8		1	
L	quantity		100	1000	100	1000	100	1000
4	13.-	6.90			14.-	8.40		
5	17.50	10.10	13.80	10.60	14.-	8.40		
6	18.50	10.80	14.50	11.50	14.-	8.40	14.50	11.50
8	20.50	11.80	14.-	11.20	14.80	8.80	15.50	12.40
10	21.-	12.60	14.50	11.50	15.10	9.-	16.60	13.30
12	23.-	13.70	15.10	12.10	15.20	9.10	18.50	14.80
14			15.90	12.80	15.50	9.40	19.10	15.30
16			17.10	13.60	15.90	9.80	20.75	16.50
18			19.90	15.70	17.30	10.60	19.60	15.60
20					17.50	10.80	20.50	16.30
22					18.-	11.30	25.50	21.25
24					20.80	12.15	20.75	16.50
28					26.25	15.80	28.-	20.50
30							30.10	21.75
32							32.50	25.50

# HRC 60

Dowel pins, steel, hardened and ground




ISO 8734 A / DIN 6325 Tol. m6

Tolerance h6: 15% surcharge

d	3		4		5		6		
c	1,2		1,4		1,7		2,1		
L	quantity	100	1000	100	1000	100	1000	100	1000
6		12.-	7.-	16.30	12.60				
8		12.-	7.-	16.30	12.60	23.-	18.40		
10		13.30	7.60	15.10	12.10	18.90	15.10	26.75	22.-
12		13.70	8.20	15.90	12.70	21.-	16.80	26.75	22.-
14		14.80	8.60	19.10	13.60	22.25	17.80	25.75	20.50
16		15.90	9.50	18.10	14.50	24.-	19.10	28.50	23.50
18		17.10	10.10	19.40	15.40	25.75	20.50	30.25	25.25
20		17.80	10.40	20.50	16.10	26.75	21.25	31.50	26.25
22		19.60	11.30	30.50	19.30	33.25	27.25	36.50	30.50
24		19.80	11.80	28.60	17.40	28.50	23.50	36.50	30.-
26		25.50	15.10	28.75	17.50	32.-	26.25	38.-	31.50
28		22.50	13.40	29.50	18.30	31.50	26.25	38.50	32.25
30		23.10	13.95	30.50	21.60	33.25	27.25	39.25	32.75
32		25.-	15.50	36.50	24.70	32.25	26.75	42.50	35.25
34						33.70	28.30	43.50	38.25
36		31.20	17.45	37.50	26.80	35.25	29.50	43.50	36.-
40				41.10	29.50	38.50	32.25	49.-	40.50
45				46.50	34.40	42.-	34.75	50.-	42.-
50						43.50	36.-	51.-	42.50
55								57.50	48.-
60						58.00	48.50	61.50	51.50
65								82.-	68.50
70								82.50	69.50
80								98.-	80.-
90								115.-	87.50
100								154.-	115.-

# HRC 60

Dowel pins, steel, hardened and ground




ISO 8734 A / DIN 6325 Tol. m6

Tolerance h6: 15% surcharge

d	8		10		12	14	16	20	
c	2,6		3		3,8	3,8	4,6	6	
L	quantity	100	1000	100	1000	100	100	100	
10		55.-	47.50						
12		49.-	43.-						
14		52.-	45.-						
16		47.-	39.-	78.50	68.-				
18		54.-	45.-	79.-	68.50				
20		54.50	45.50	71.50	45.-				
22		55.50	46.-	74.-	48.-				
24		53.-	44.-	75.50	48.50	125.-			
26		57.50	48.-	76.-	50.-				
28		59.-	49.50	85.-	53.50	128.-			
30		62.50	52.-	86.50	55.50	131.-	211.-		
32		63.50	55.-	92.-	59.-	134.-			
(34)		75.-	67.40			171.-			
36		61.50	51.-	99.-	65.-	165.-	240.-		
40		67.-	58.50	100.-	65.50	166.-	256.-	290.-	
45		75.-	64.50	101.-	66.50	175.-	276.-	322.-	
50		81.50	70.50	108.-	74.-	184.-	298.-	260.-	535.-
55		94.50	82.50	115.-	85.50	191.-	298.-	310.-	
60		96.-	83.50	131.-	89.50	185.-	306.-	335.-	620.-
65		106.-	92.-					365.-	
70		106.-	92.-	146.-	99.-	229.-		443.-	
80		120.-	104.-	184.-	125.-	244.-	384.-	450.-	795.-
90		147.-	116.-	191.-	135.-	316.-	435.-	495.-	865.-
100		163.-	129.-	228.-	151.-	322.-	515.-	510.-	900.-
120		200.-	175.-	302.-	268.-	431.-	580.-	550.-	995.-

# HRC 60

Dowel pins, steel, hardened and ground with internal thread



ISO 8735 A / DIN 7979 D Tol. m6

d	m6	6	8	10	12	16	20	
c	≈	2,1	2,6	3	3,8	4,6	6	
d2		M 4	M 5	M 6	M 6	M 8	M 10	
b		6	8	10	12	16	18	
t	min.	10	12	16	20	25	28	
L	quantity	100-	100-	100-	100-	100-	100-	
16		62.-						
18		63.50						
20		65.50	71.-					
24		67.-	78.-	87.-				
28		68.50	88.-	91.50	151.-			
32		72.50	103.-	104.-	126.-			
36		78.-	107.-	115.-	139.-			
40		81.-	110.-	120.-	174.-	252.-		
50		88.-	124.-	138.-	203.-	320.-	390.-	
60		104.-	129.-	159.-	231.-	392.-	470.-	
70			139.-	175.-	244.-	400.-	505.-	
80			150.-	181.-	258.-	430.-	585.-	
90				198.-	270.-	470.-	605.-	
100					290.-	515.-	640.-	
120					324.-	560.-	955.-	

- Order quantity below 100 pieces 35% surcharge


**Maryland Metrics Fastener Catalog - Chapter J** Owings Mills, MD 21117 USA

phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 e-mail: techinfo@mdmetric.com  
copyright 2003 maryland metrics/kyburz ch

# HRC 60

Taper pins, steel, hardened and ground

ISO 2339 A / SN 212770 A



Taper 1:50


DIN 1

d	h10	3		4		5		6	
a	≈	0,4		0,5		0,63		0,8	
L	quantity	100	1000	100	1000	100	1000	100	1000
12		43.50	30.75						
16		45.30	31.50	51.-	37.75				
(18)				51.50	38.25				
20		46.-	32.25	53.-	39.25	62.-	46.-	102.-	73.-
(22)		47.50	32.75						
24		48.50	33.50	54.50	40.-				
(25)				69.50	54.-				
26		49.50	34.50						
30				58.-	43.-	72.20	53.10	114.-	82.-
(32)						74.50	54.50		
35		55.50	39.60			76.20	55.40	120.-	90.-
40		56.50	40.70	64.-	51.10	81.-	68.-	144.-	118.-
45		61.-	45.-			112.-	95.-	146.-	120.-
50				78.50	61.10	91.50	77.30	152.-	127.-
55				83.-	66.40				
60								170.-	145.-
80								228.-	196.-

# HRC 60


Taper pins, steel, hardened and ground

ISO 2339 A / SN 212770 A



d	h10	8	10
a	≈	1	1,2
L	quantity	100	100
30		167.-	236.-
40		185.-	258.-
45		191.-	278.-
50		198.-	292.-
55		210.-	
60		231.-	328.-
70		284.-	388.-
80		326.-	435.-
90		354.-	550.-
100		382.-	680.-

Hammer drive screws  
steel, case-hardened

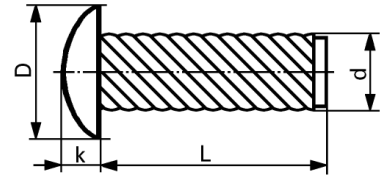

## K 860

nickel plated

d	1,47	1,85		2,49		2,89		3,5	
D ± 0,5	2,4	3,1		3,9		5,2		6,3	
k ± 0,1	0,73	1,1		1,6		2,0		2,4	
hole size	1,3	1,7		2,18		2,64		3,05	
L quantity	1000	100	1000	100	1000	100	1000	100	1000
3	4.70	5.20	3.05	5.20	3.25				
4	5.90	5.20	3.25	5.90	3.50	7.80	5.10		
6	6.50	5.70	3.40	6.20	3.75	6.80	4.15	7.80	4.50
7				7.20	4.10	6.90	4.30	9.30	5.60
9						10.20	8.40	10.80	8.75