



New LF 3000 16 mm

An Even More Extensive Range

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Parker Legris connectic

products are available from

MARYLAND METRICS

P.O. Box 261 Owings Mills, MD 21117 USA

ph: (410)358-3130 (800)638-1830

fx: (410)358-3142 (800)872-9329

email: sales@mdmetric.com web: <http://mdmetric.com>

RFQ form: <http://mdmetric.com/rfq.htm>

ENGINEERING YOUR SUCCESS.



16 mm DIAMETER LF 3000 INSTANT FITTINGS AND TUBING

Pneumatic panels

Vacuum networks

Robotics

Textile machinery

Packaging equipment / machines

Semiconductor equipment

All compressed air circuits

An Even More Extensive Range

- An additional, bigger diameter for a more versatile range
- Adapted to the most modern machinery, composed of independent modules


All the Advantages of the LF 3000 Range

- Instant connection and disconnection
- Performance and reliability
- Lightweight
- Compact
- Vacuum capability
- Aesthetic design

A Dedicated Range of Tubing in 16 mm Diameter

- The best fitting/tubing trade-off on the market
- Polyamide tubing: provides optimum mechanical properties and chemical resistance
- Polyurethane tubing: extremely flexible, allowing compact cabling where a small bend radius is required

> Technical Characteristics



	Fittings	PA & PU Tubing
Suitable Fluids	Compressed air	Compressed air (for other fluids, please contact us)
Working Pressure	up to 20 bar (at 20°C)	up to 12/13 bar (at 20°C)
Working Temperature	-20°C to +80°C	-15°C to +70°C for PU tubing -40°C to +80°C for PA tubing
Vacuum	99% (755 mm Hg)	99% (755 mm Hg)

All items in the LF 3000 range are guaranteed silicone-free


> Tubing Performances

Polyurethane Tubing Performances

ØD (mm)		Wall Thickness (mm)		Max. Ovality (mm)	Min. Bend Radius @ +23°C (mm)
ext.	Tolerances	e	Tolerances		
16	± 0.15	2.5 max.	+ 0.15 - 0.07	0.3	45 Max flow: 88

Safety coefficient= x3 to obtain burst pressure

Close tolerance to perfect sealing according to the NF E49-101 standard

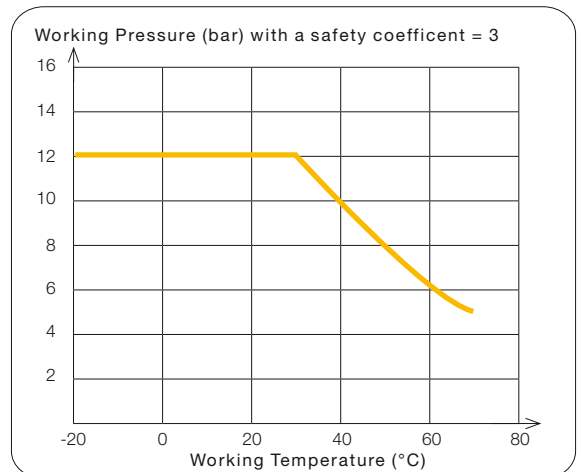


Polyamide Tubing Performances

ØD (mm)		Wall Thickness (mm)		Max. Ovality (mm)	Min. Bend Radius @ +23°C (mm)
ext.	Tolerances	e	Tolerances		
16	+ 0.05 - 0.10	1.5	± 0.08	0.28	115

Safety coefficient= x3 to obtain burst pressure

Close tolerance to perfect sealing according to the NF E49-100 standard

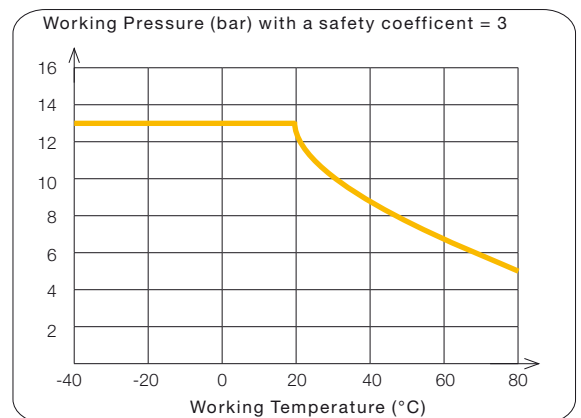

> Regulations

Products are manufactured from materials without any hazardous or prohibited substances.

New Machinery directive 2006/42/EC: our products comply with this directive to guarantee safe use and security of equipment.

The LF 3000 range also meets the latest international standard ISO 14743 - for instant fittings used in conjunction with thermoplastic tubes.




2002/95/EC

REACH Regulation n°1907/2006


> Threaded Fittings

3175 Male stud fitting, hexagonal, BSPT thread




ØD	C		F1	F2	H	K	
16	R3/8	3175 16 17	27	9	32,5	29	0,069
16	R1/2	3175 16 21	27	12	32,5	29	0,079

3101 Male stud fitting, hexagonal, BSPP thread




ØD	C		E	F1	F2	H	K	
16	G3/8	3101 16 17	7,5	27	9	32,5	29	0,061
16	G1/2	3101 16 21	9	27	12	32,5	29	0,066

3114 Female stud fitting, BSPP thread




ØD	C		E	F	H	
16	G1/2	3114 16 21	15	27	49	0,101

3109 Male stud elbow, BSPT thread



ØD	C		F	G	H	L	
16	R3/8	3109 16 17	27	27	53	39	0,106
16	R1/2	3109 16 21	27	27	53	39	0,104


3199 Male stud elbow, BSPP thread



ØD	C		E	F	G	H	L	
16	G3/8	3199 16 17	7,5	27	27	54,5	39	0,101
16	G1/2	3199 16 21	9	27	27	54,5	39	0,097


> Threaded Fittings

3169 Extended male stud elbow, BSPP thread




ØD	C		E	F	G	H	L	
16	G3/8	3169 16 17	7,5	27	27	82,5	52	0,220
16	G1/2	3169 16 21	9	27	27	82,5	52	0,206

3103 Male stud run tee, BSPT thread




ØD	C		F	G	H	H1	L	
16	R3/8	3103 16 17	27	27	78	39,5	38,5	0,126
16	R1/2	3103 16 21	27	27	78	39,5	38,5	0,124

3108 Male stud branch tee, BSPT thread




ØD	C		F	G	H	$\frac{L}{2}$	
16	R3/8	3108 16 17	27	27	53	38,5	0,128
16	R1/2	3108 16 21	27	27	53	38,5	0,124

3193 Male stud run tee, BSPP thread



ØD	C		E	F	G	H	H1	L	
16	G3/8	3193 16 17	7,5	27	27	79,5	41	38,5	0,121
16	G1/2	3193 16 21	9	27	27	79,5	41	38,5	0,117


3198 Male stud branch run tee, BSPP thread



ØD	C		E	F	G	H	$\frac{L}{2}$	
16	G3/8	3198 16 17	7,5	27	27	54,5	38,5	0,121
16	G1/2	3198 16 21	9	27	27	54,5	38,5	0,117


> Tube-to-Tube Fittings

3106 Equal and unequal tube/tube connector




ØD1	ØD2		G	L	
16	16	3106 16 00	27	60,5	0,041
16	12	3106 12 16	27	61	0,066

3102 Equal elbow



ØD		G	L	
16	3102 16 00	27	52	0,043


3104 Equal and unequal tee



ØD1	ØD2		G	H	$\frac{L}{2}$	
16	16	3104 16 00	27	52	39	0,063
16	12	3104 16 12	27	52,5	39	0,088


> Fittings and Accessories

3136 Female bulkhead connector, BSPP thread



ØD	C		E	F1	F2	K _{max}	L1	L2	T _{mini}	
16	G3/8	3136 16 17	12	29	29	10,5	30	15	27,5	0,135
16	G1/2	3136 16 21	15	29	29	10,5	30	19,5	27,5	0,141





3126 Blanking plugs




ØD		G	L	L1	
16	3126 16 00	19	57	35	0,063

> Technical Tubing






Polyurethane polyester tubing

O.D. Tube (mm)	I.D. Tube (mm)	Minimum bend radius for tube at ambient temp. (mm)	Length (m)				
16	11	45	25	1025U16 01 11	1025U16 02 11	1025U16 03 11	1025U16 04 11
16	11	45	100	1100U16 01 11	1100U16 02 11	1100U16 03 11	1100U16 04 11

Polyurethane polyether tubing


O.D. Tube (mm)	I.D. Tube (mm)	Minimum bend radius for tube at ambient temp. (mm)	Length (m)	
16	11	45	25	1025U16R08 11
16	11	45	100	1100U16R08 11



Polyamide tubing

O.D. Tube (mm)	I.D. Tube (mm)	Minimum bend radius for tube at ambient temp. (mm)	Length (m)					
16	13	115	25	1025P16 00 13	1025P16 01 13	1025P16 02 13	1025P16 03 13	1025P16 04 13
16	13	115	100	1100P16 00 13	1100P16 01 13	1100P16 02 13	1100P16 03 13	1100P16 04 13

> Related Products

3000 71 00 Tube Cutter



	H	L	
3000 71 00	25	79	0,029

This tool is designed to give a clean cut at right angles to the tube axis and will cut all resilient plastic tubes (polyamide, polyurethane, etc....), from 4 mm to 16 mm diameters inclusive.

A spring maintains the cutter in the closed position.

Replacement blades are available: part number **3000 71 00 05**.

Parker Legris has a continuous product development policy and therefore reserves the right to modify products shown in this catalogue. Please treat all dimensions therefore as indicative.

Parker Legris Connectic offers a comprehensive range of connection solutions; please consult our general catalogue or visit www.legris.com or www.parkerconnectic.com.



Parker Legris connectic

products are available from

MARYLAND METRICS

P.O. Box 261 Owings Mills, MD 21117 USA

ph: (410)358-3130 (800)638-1830

fx: (410)358-3142 (800)872-9329

email: sales@mdmetric.com web: <http://mdmetric.com>

RFQ form: <http://mdmetric.com/rfq.htm>



Fluid System Connectors Europe
**Parker Hannifin Manufacturing
France SAS**

Parker Hannifin Corporation
CS 46911 - 74 rue de Paris
35069 Rennes

Phone: +33 (0)2 99 25 55 00

Fax: +33 (0)2 99 25 55 99